

SEMITURK

STUP031660 3x16 Meter 60 Ton Truck Unloading Platform







BÜYÜKYÜKSEL DAMPER VE HİDROLİK MAK. SAN. TİC. LTD. ŞTİ.

TRADEMARK NAME: SEMITURK

FEVZI ÇAKMAK MAH. MEDCEZIR CAD. NO: 8/116 B BLOK KONYA / TÜRKİYE


www.yukseldamper.com.tr - www.semiturk.com.tr

E-mail: info@yukseldamper.com.tr - Tel: +90 332 239 1860 / +90 530 610 1432





DAM.HID.MAK.SAN.TIC.LTD.ŞTİ. STUP031660 3x16 Meter 60 Ton Truck Unloading Platform

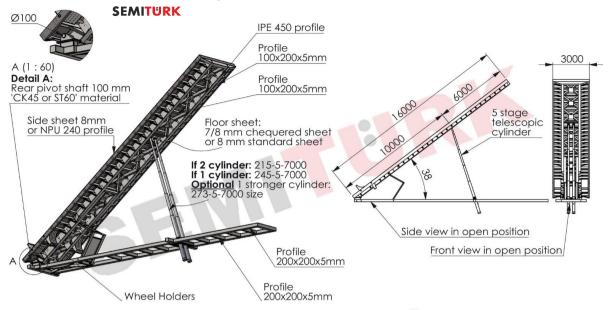

Truck Unloading Platform		STUP0320100
Weights & Dimensions (± %5)	Product	Hydraulic Truck Unloading Platform Truck Dumpers Truck Tipper Platform
	Installation Type	Channel Type (optional above-ground, side-tilting or other types and/or special design)
	Size of Platform (WxL)	3 Meter (W) x 20 Meter (L) (optional 3x18, 3x20 or other sizes and/or special design)
	Lifting Capacity	60 Tons gross weight (optional 80 Tons, 100 Tons or other capacity and/or special design)
	Tilting / Opening Angle	38° (varies depending on optional options)
	Tare Weight	12.000 kg ± %10 with accessories (varies depending on optional options)
Body / Chassis		Main chassis are produced from "IPE 450" profile. Other body/structure metal parts produced from box profile and 'ST37/S235' quality sheet (or <u>optional</u> other material options according to needs and also varies depending on <u>optional</u> options)
Sub-frame		Produced from '200x200x5mm profile' or 'NPU 200' profile and reinforced with supports
Floor Sheet		Floor sheet 7/8 mm non-skid chequered or 8 mm ST37/S235 sheet (or optional other options)
Wheel Holders / Stoppers		2 rows of hydraulically controlled wheel holders that working as pair (right - left)
Balance Plate		A balance plate is placed under the platform to absorb unbalanced loads as mechanically
Hydraulic Cylinder/s (For Rear Tipping)		2 pcs 215-5-7000 or 1 pcs 245-5-7000 hydraulic cylinder/s optional other combinations
Hydraulic Unit		Placed under the platform, includes hydraulic and electrical equipment and accessories
Hydraulic Valve/s		24V DC continuous operation type optional other combinations
Hydraulic Pump (Varies depending on options)		1 pcs 65-97 l/m gear or piston pump and 1 pcs 9cc gear pump optional other combinations
Electrical Motors (Varies depending on options)		1 pcs 3x380 Volt - 1500 rpm 30-37 kW and 1 pcs 2-4 kW electrical motor that flanged type
Equipment Control (Remote & Manual Control)		PLC controlled remote control system and manually control buttons from panel (up-down)
Paint (with up to date RAL colour options)		Metal parts are painted 1-layers anti-corrosive epoxy primer then top acrylic paint coat
Standard Accessories		Oil cooler radiator or oil heater, limit switch sensor, hydraulic filter, oil tank, oil temperature gauge, oil level gauge, oil pressure gauge, oil inlet cap and ventilation cap, R2 type high pressure hoses and other required accessories
Optional Features / Hardwares		Lubrication, overflow, high and low voltage warning display hardware and software system

BÜYÜKYÜKSEL DAMPER VE HİDROLİK MAK. SAN. TİC. LTD. ŞTİ.

TRADEMARK NAME: SEMITURK

FEVZI ÇAKMAK MAH. MEDCEZIR CAD. NO: 8/116 B BLOK KONYA / TÜRKİYE

www.yukseldamper.com.tr-www.semiturk.com.tr

E-mail: info@yukseldamper.com.tr - Tel: +90 332 239 1860 / +90 530 610 1432

