



BÜYÜKYÜKSEL

DAM.HİD.MAK.SAN.TİC.LTD.ŞTİ.

SEMITURK

MODEL: STHT51AG10 | Ultra-Light Series

Double Bottom Dump Trailers with Aluminum Hopper



SEMITURK



BÜYÜKYÜKSEL DAMPER VE HİDROLİK MAK. SAN. TİC. LTD. ŞTİ.

TRADEMARK NAME: SEMITURK

FEVZİ ÇAKMAK MAH. MEDCEZİR CAD. NO: 8/116 B BLOK KONYA / TÜRKİYE

www.yukseldamper.com.tr - www.semiturk.com.tr


E-mail: info@yukseldamper.com.tr - Tel: +90 332 239 1860 / +90 530 610 1432



BÜYÜKYÜKSEL

DAM.HİD.MAK.SAN.TİC.LTD.ŞTİ.

SEMITURK

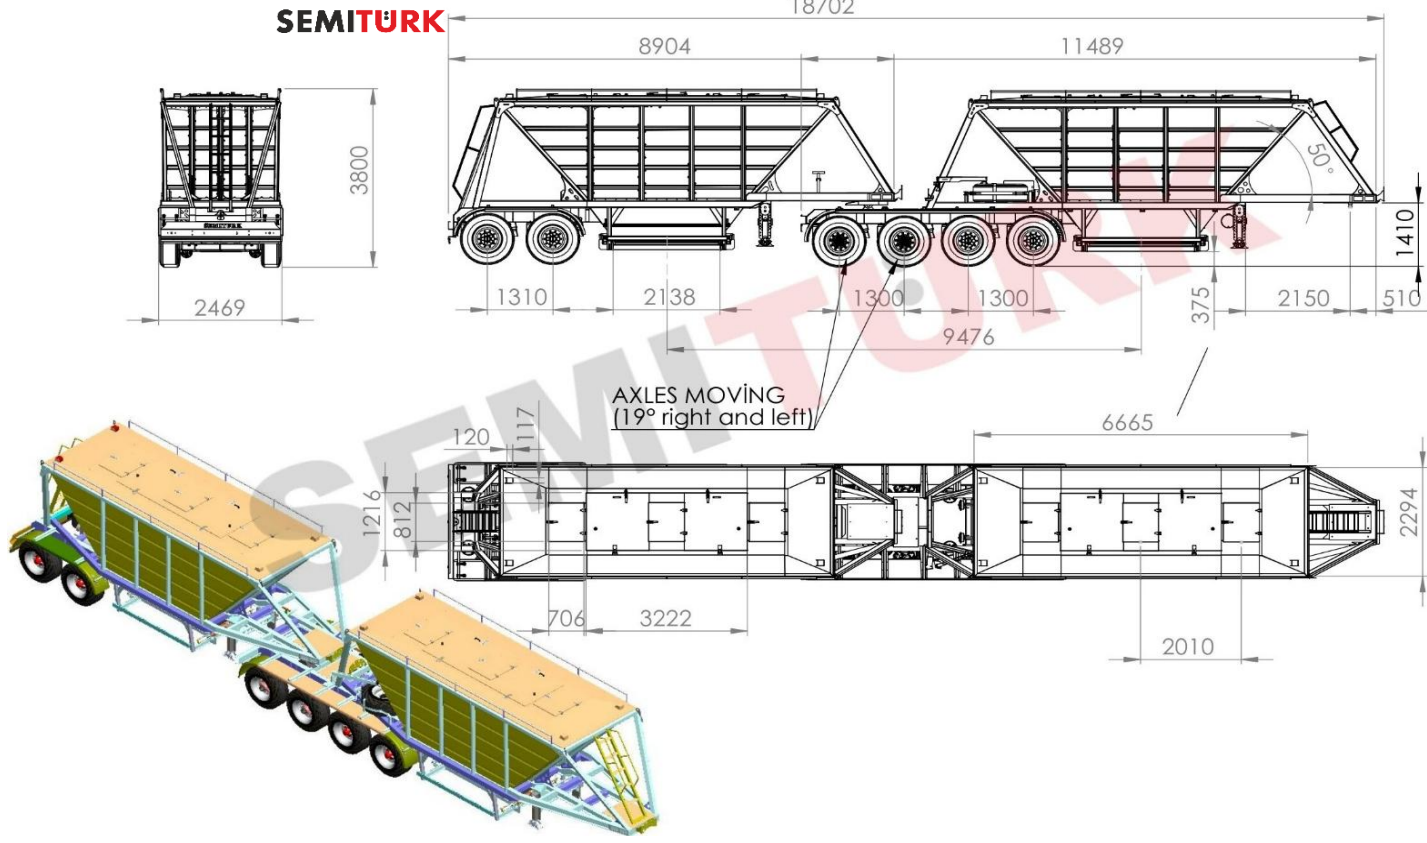

BOTTOM HOPPER SEMI-TRAILER

STHT51AG10

Weights & Dimensions (± %5)	Product Type / Volume	Double Bottom Dump Trailers with Aluminum Hopper Belly Dump Trailers / Usable 54 m ³
	Total Length	18.700 mm (<u>optional</u> size options)
	Total Width	2.500 mm (<u>optional</u> size options)
	Total Height	3.800 mm (<u>optional</u> size options)
	Tare Weight	5.200 (± %4) + 7.300 kg (± %4) = Max. 13.000 kg (varies depending on <u>optional</u> options)
	GVW of Trailer	72.350 Kg (<u>without truck weight</u>) - Weight of truck will be added to the overall total
Body / Chassis		The main carrier construction and chassis 'S700MC' sheet, Hopper body and upper compartments / caps 'Aluminium Alloy' sheet, Hopper body is bolt connected to metal body
Axles		4 + 2 axle, Each one 12 tons capacity, Disc or <u>optional</u> drum brake type, 22.5" rim size
Steerable Axle/s		On 4-axle semi-trailer (front) 3rd and 4th axles mechanically steerable <u>optional</u> other comb.
Suspension System		Air suspension system hardware (or <u>optional</u> other compatible combinations)
Tires		(8+1) + (4+1) unit 385/65 R22.5" size tubeless tyre and 22.5x11.75" size rim set <u>or</u> other comb.
Unloading / Discharge System		Heavy-duty double-door pneumatic bottom-discharge gates <u>optional</u> clamshell gate type
Top Covers / Filling Hatches		3 pcs 800mm (W) x 700mm (L) + 1 pcs 1200 (W) x 3200 (L) covers on top <u>or</u> other comb.
Brake System		Dual circuit brake hardware, 1 x 4S/2M EBS (Front) + 1 x 2S/2M EBS (Rear) <u>or</u> other comb.
Electrical Hardware (At Each)		24 V lighting hardware, 2x7 pins electrical socket, 2 tail light, 4x2 side, 2 front lamps
King-Pin		Bolt-connected 3,5" head (changeable with 2" head) king pin, SAE/DIN norms, D:190-260 kN
Landing Legs		2 pairs, Mechanically two-speed semi-trailer landing gear set with a capacity of 24 tons
Paint (with up to date RAL colour options)		Metal parts are painted 2-layers anti-corrosive epoxy primer then top acrylic paint coat
Standard Accessories		(8+4) x FRP mudguards, 1 x Axle nut removal tool, 1 x Spare tire with holder, 1 x Fire extinguisher tube cabinet, 1 x Water tank "chrome nickel or plastic", 1 x Wheel chock and holder, Lockable tool box, Lateral protection devices, Access stairs, English user manual

BÜYÜKYÜKSEL DAMPER VE HİDROLİK MAK. SAN. TİC. LTD. ŞTİ.

TRADEMARK NAME: SEMITURK

FEVZİ ÇAKMAK MAH. MEDCEZİR CAD. NO: 8/116 B BLOK KONYA / TÜRKİYE

www.yukseldamper.com.tr - www.semiturk.com.tr

E-mail: info@yukseldamper.com.tr - Tel: +90 332 239 1860 / +90 530 610 1432